


2. Three Phase Capacitor (Internal Star / Delta Connected)

Technical Characteristics	
Standard	IS 13925 (Part-I-1998) / IEC 60871 (Part-I-1997)
Installation	Indoor / Outdoor
Rated Voltage	1.9 KV TO 24 KV
Rated Capacity	100kvar to 1000 kvar.
Dielectric	ALL FILM
Impregnant	Non-toxic , Non-chlorinated , bio- degradable oil.
Ambient air temperature	-25°C to +55°C
Max. Permissible Voltage	110% for 8/12hr in every 24 hr.
Max. Permissible Current	130% of rated current.
Tolerance of capacity	-5% to +15% .
Temperature rise	Less than 10°C above ambient.

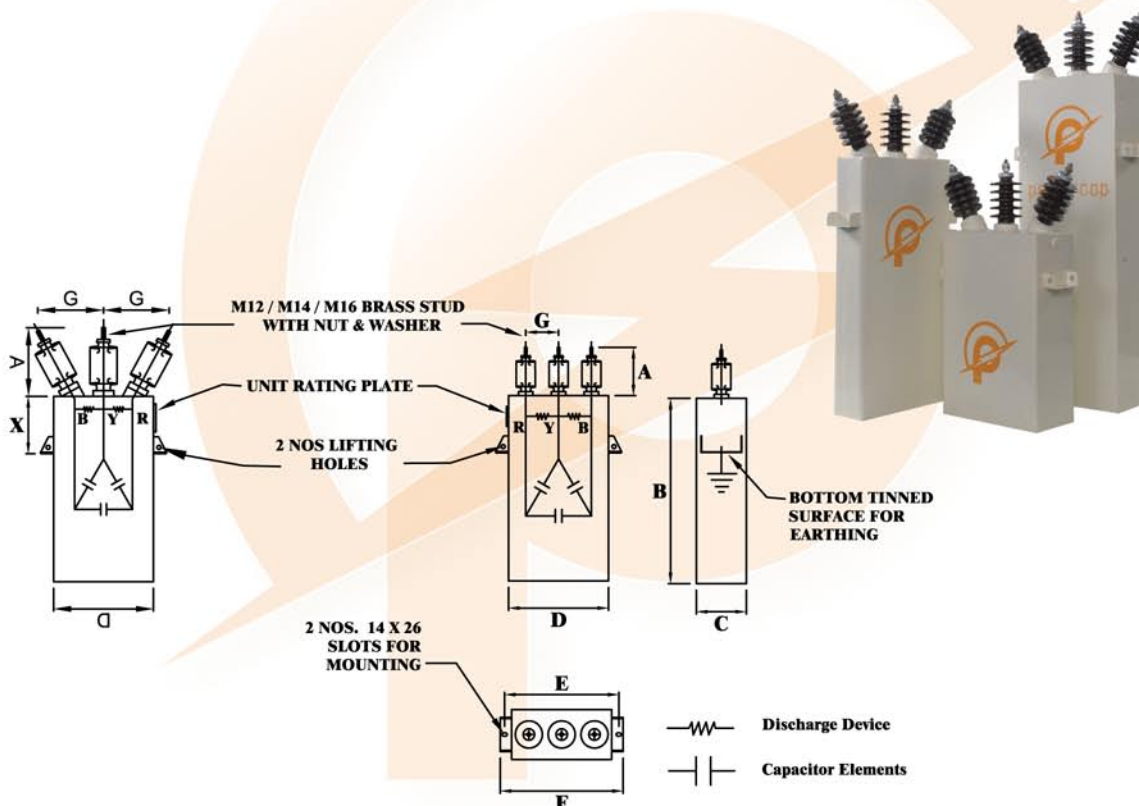

Rated Voltage [Vn] (kv)	BIL (kv)	Rated capacity [kvar]	Dimensions (in mm)				
			A	D	E	F	G
3.3	10 / 40	50 to 400	155	350	396	442	230
7.2	20 / 60	100 to 400	155	350	396	442	230
		400 to 600	160	460	506	552	230
12.1	28 / 75	100 to 500	205	350	396	442	230
		500 to 1000	210	460	506	552	250
24	50 / 125	100 to 500	270	350	396	442	230
		600 to 1000	275	460	506	552	250