


4. Four Bushing Capacitor (3 Phase + Neutral)

Technical Characteristics	
Standard	IS 13925 (Part-I-1998) / IEC 60871 (Part-I-1997)
Installation	Indoor / Outdoor
Rated Voltage	2.4 KV TO 7.2 KV
Rated Capacity	75 to 400 kvar for Vn 2.4 - 3.3 kv & 100 - 500 kvar for Vn 4.16 - 7.2 kv
Dielectric	ALL FILM
Impregnant	Non-toxic , Non-chlorinated , bio- degradable oil.
Ambient air temperature	-25°C to +55°C
Max. Permissible Voltage	110% for 8/12hr in every 24 hr.
Max. Permissible Current	130% of rated current.
Tolerance of capacity	-5% to +15% .
Temperature rise	Less than 10°C above ambient.

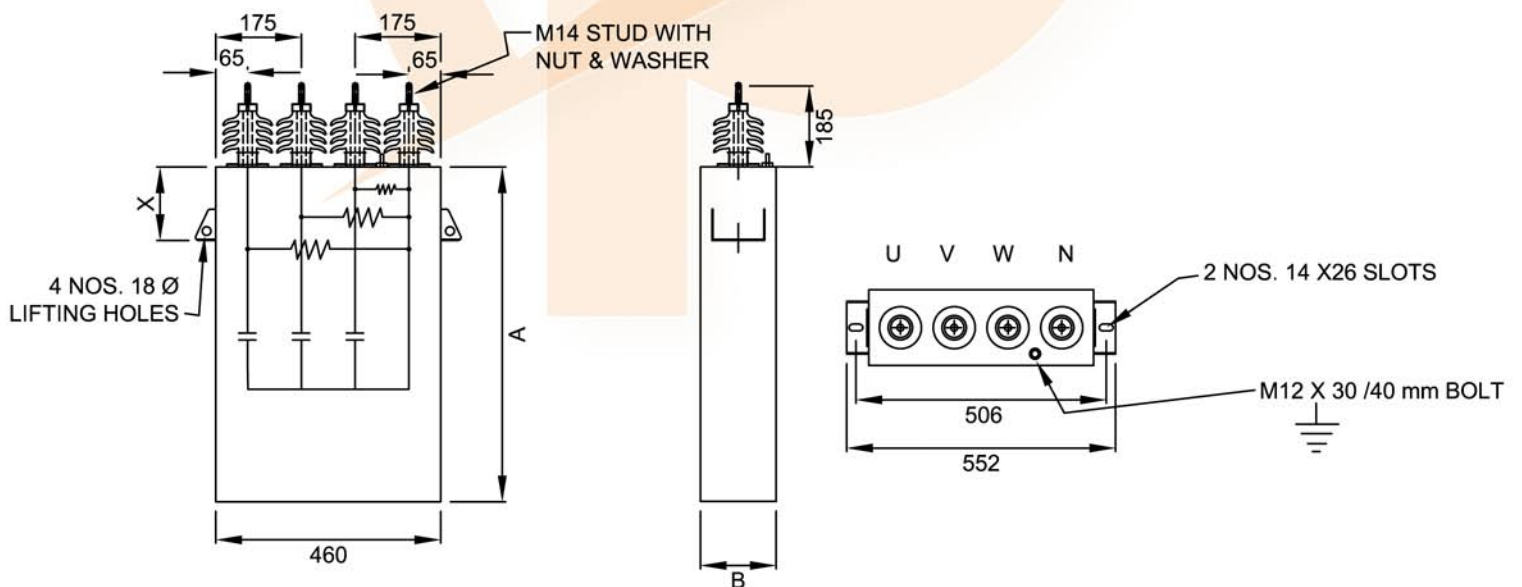

Note : Dimensions "A & B" are variable based on rated Vn, Kvar & Hz etc., Dimension "X" can be as per specific requirement.