


1. Single Phase, Single / Two Bushing Capacitor

Technical Characteristics	
Standard	IS 13925 (Part-I-1998) / IEC 60871 (Part-I-1997)
Installation	Indoor / Outdoor
Rated Voltage	1.9 KV TO 24 KV
Rated Capacity	50 kvar to 1000 kvar.
Dielectric	ALL FILM
Impregnant	Non-toxic , Non-chlorinated , bio- degradable oil.
Ambient air temperature	-25°C to +55°C
Max. Permissible Voltage	110% for 8/12hr in every 24 hr.
Max. Permissible Current	130% of rated current.
Tolerance of capacity	.5% to +15% .
Temperature rise	Less than 10°C above ambient.



Single Phase Two Bushing Capacitor

Single Phase, Single Bushing Capacitor

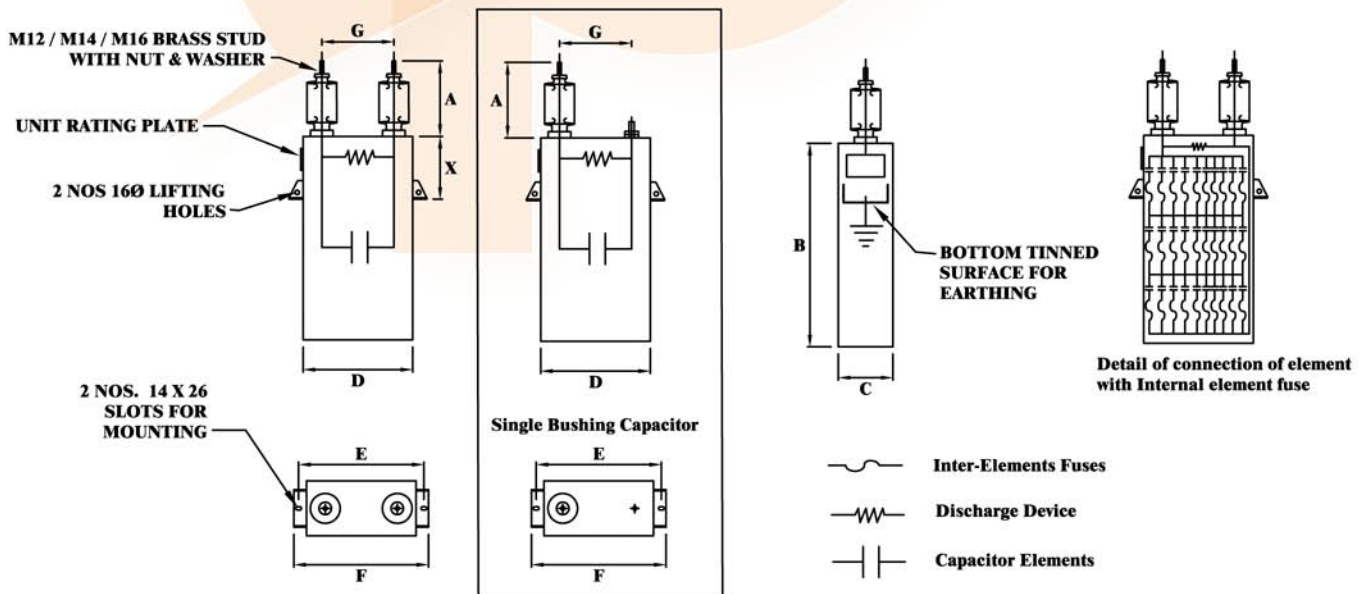

Note : Dimensions "B & C" are variable based on rated Vn, Kvar & Hz etc., Dimension "X" can be as per specific requirement.